


Power Take Offs

Ref. TF2001AP

CANTER

M2-S5; M3-S5 Pneumatic Control

To apply with Gear Pumps or Piston Pumps

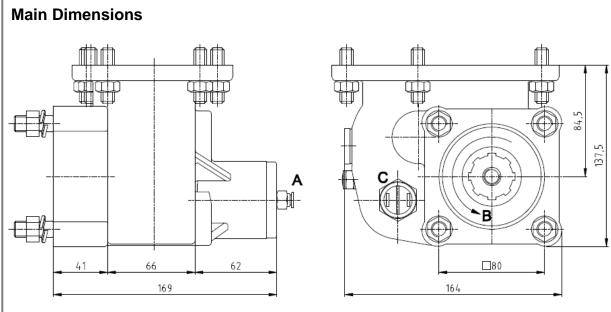

A - Air connection

B - Pump rotation

C - Option: Electric sensor with mechanical driving Ref. TF2001APS or TF2001APC

(Dimensions in mm)

Main Data	
Continuous Torque (Nm)	150
Intermittent Torque (Nm)	210
Power (at 1000 rpm)	21 cv / 16 kW
Mounting Position	Left
Pump Rotation	Right Hand
Weight (kg)	5
PTO internal ratio	1:1
Indicative ratio from motor to PTO's output	

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material.

