


Power Take Offs

Ref. TF2003AP

CANTER

MO35S5; MO35S6 Pneumatic Control

To apply with Gear Pumps or Piston Pumps

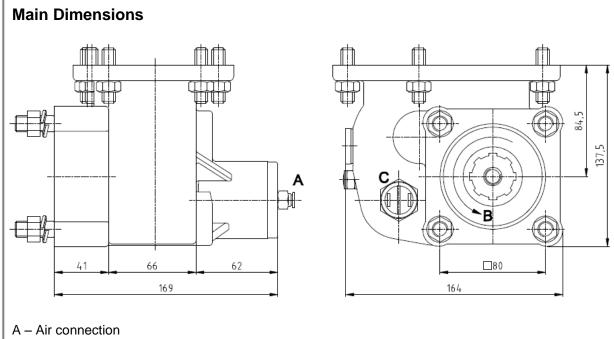

- B Pump rotation
- C Option: Electric sensor with mechanical driving Ref. TF2003APS or TF2003APC

(Dimensions in mm)

Main Data	
Continuous Torque (Nm)	150
Intermittent Torque (Nm)	210
Power (at 1000 rpm)	21 cv / 16 kW
Mounting Position	Left
Pump Rotation	Right Hand
Weight (kg)	5
PTO internal ratio	1:0,91
Indicative ratio from motor to PTO's output	1:0,43

