




Power Take Offs		Ref. TF2003AV
CANTER	MO35S5 ; MO35S6 Vacuum Control	

To apply with Gear Pumps or Piston Pumps

Main Dimensions

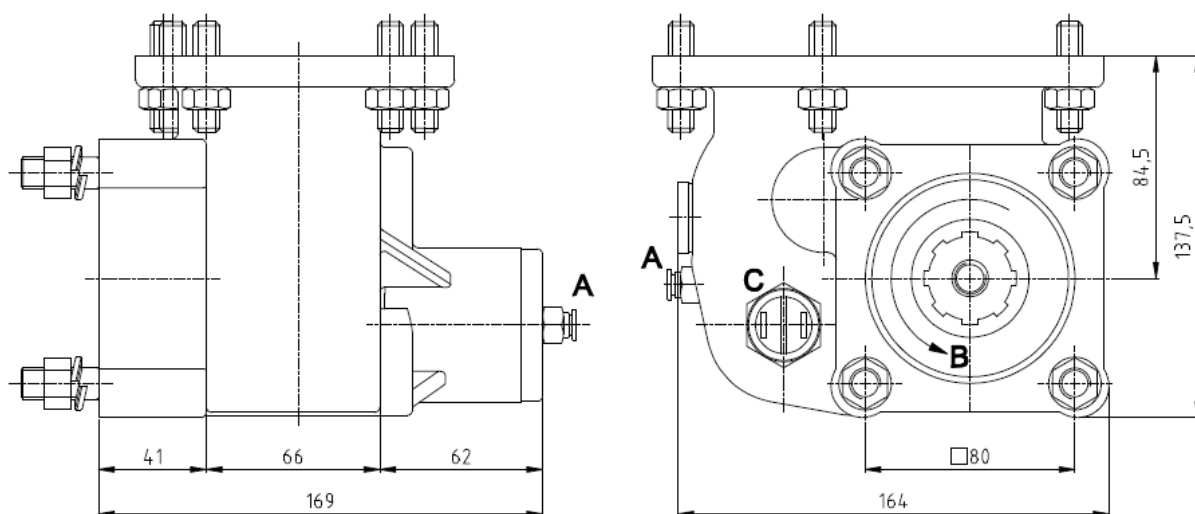

A – Vacuum connection

B – Pump rotation

C – Option: Electric sensor with mechanical driving Ref. TF2003AVS or TF2003AVC

(Dimensions in mm)

Main Data	
Continuous Torque (Nm)	150
Intermittent Torque (Nm)	210
Power (at 1000 rpm)	21 cv / 16 kW
Mounting Position	Left
Pump Rotation	Right Hand
Weight (kg)	5
PTO internal ratio	1:0,91
Indicative ratio from motor to PTO's output	1:0,43

CTI TF2003AV 1211- 4

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material.



ABER - Embragens e Comandos Hidráulicos - A. B. LDA

Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470 MAIA - Portugal

Telephone: +351.22.9438070 Fax: +351.22.9420823 e-mail: aber@aber.pt <http://www.aber.pt>

1/1