


## **Power Take Offs**

Ref. TF3003V

ISUZU MSA 5G; MSA 5P Vacuum Control

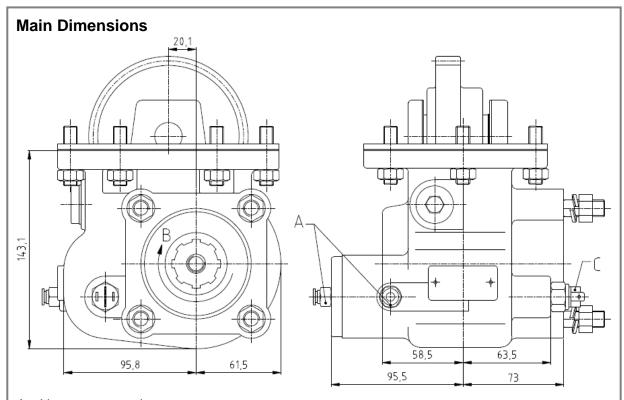

- A Vacuum connection
- B Pump rotation
- C Option: Electric sensor with mechanical driving Ref. TF3003VS or TF3003VC

(Dimensions in mm)

Main Data	
Continuous Torque (Nm)	300
Intermittent Torque (Nm)	420
Power (at 1000 r.p.m)	42 C.V. / 32 Kw
Mounting Position	Left
Pump Rotation	Left Hand
Weight (Kg)	11
PTO internal ratio	1:1,19
Indicative ratio from motor to PTO's output	

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material.

