


## Power Take Offs Relation 1 : 1,32

VOLVO

R61 ; MR61 ; SR61 ; R62 ; MR62 ; SR62 ; R60

## To apply with Gear pumps or with Piston Pumps

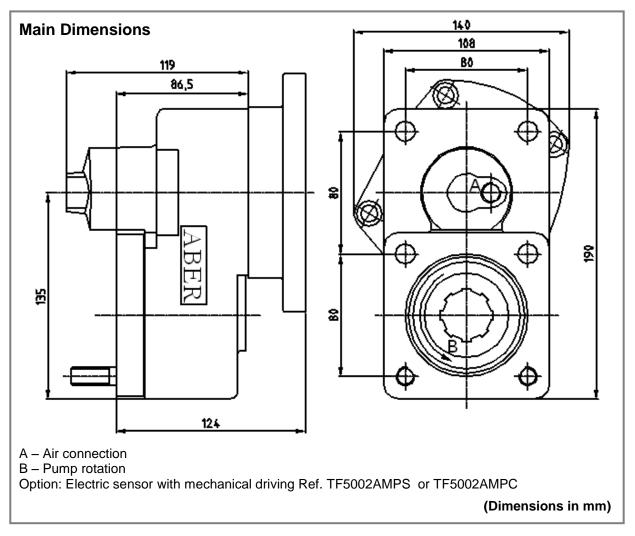

Main Data			
Continuous Torque (Nm)			300
Intermittent Torque (Nm)			420
Power (at 1000 rpm)			42 cv / 32 kW
Mounting Position			Rear
Pump Rotation			Right Hand
Weight (kg)			10
PTO internal ratio			1:1,32
Indicative ratio	from motor to PT	D´s output	
R61 ; R62	1 : 1.030		
MR61 ; MR62	1 : 1.030		
SR 61 ; SR 62	High: 1 : 1.150	Normal: 1:0.970	

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material



ABER - Embraiagens e Comandos Hidráulicos - A. B. LDARua Francisco de Almeida, № 30 – Vila Nova da Telha – 4470 MAIA - PortugalTelefone: +351.22.9438070Fax: +351.22.9420823 e-mail: <a href="mailto:aber@aber.pt">aber@aber.pt</a> <a href="http://www.aber.pt">http://www.aber.pt</a>1/1