


Power Take Offs

Relation 1:1

VOLVO R61; MR61; SR61; R62; MR62; SR62; R60

To apply with Gear pumps or with Piston Pumps

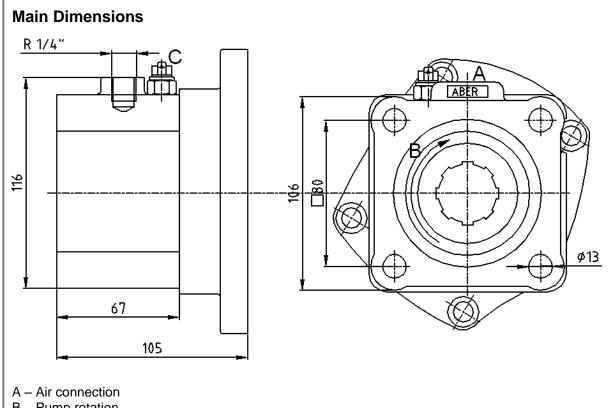

B - Pump rotation

C - Option: Electric sensor with mechanical driving Ref. TF5002SPS or TF5002SPC

(Dimensions in mm)

Ref. TF5002SP

Main Data	
Continuous Torque (Nm)	300
Intermittent Torque (Nm)	420
Power (at 1000 rpm)	42 cv / 32 kW
Mounting Position	Rear
Pump Rotation	Left Hand
Weight (kg)	6,5
PTO internal ratio	1:1
Indicative ratio from motor to PTO's output	
R61 · R62 1 · 0.780	

MR61; MR62 1:0.780

SR 61; SR 62 High: 1: 0.871 Normal: 1:0.735

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material

