


Main Dimensions

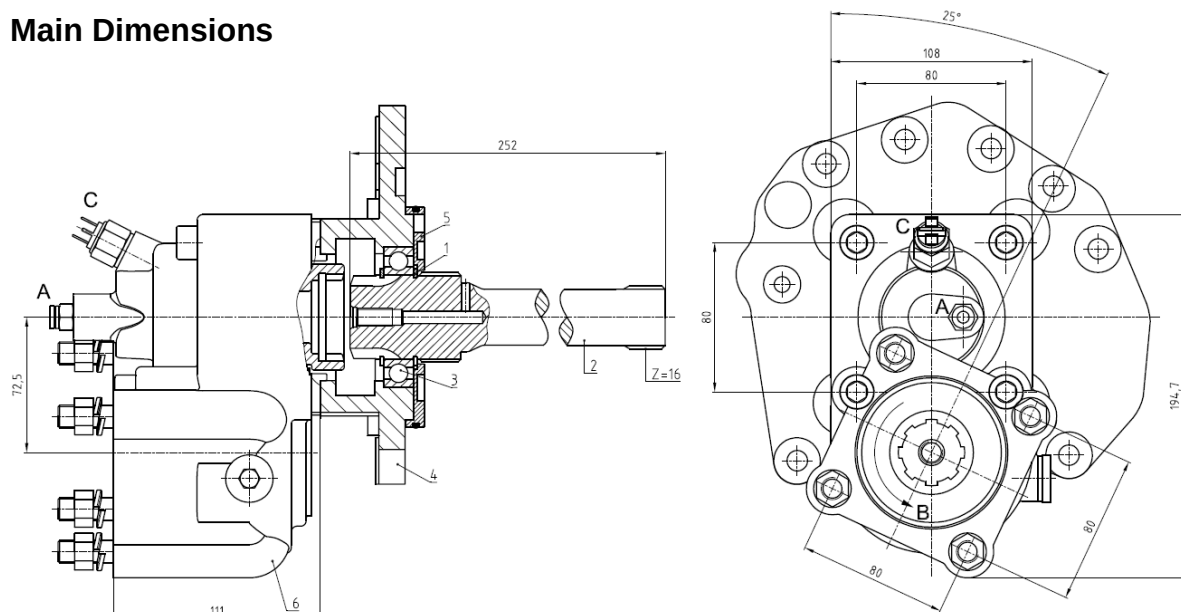

- A – Air connection
B – Sense of rotation
C – Option: Electric sensor with mechanical driving Ref. TF8013AMPS or TF8013AMPC
1 – Circlip
2 – Adapter shaft VK8005
3 – Bearing
4 – Flange
5 – Plate
6 – TF4033AMP

(Dimensions in mm)

Main Data							
Continuous Torque (Nm)				500			
Intermittent Torque (Nm)				550			
Power (at 1000 rpm)				69 cv / 51 kW			
Mounting Position				Rear			
Pump Rotation				Right Hand			
Weight (kg)				17			
PTO internal ratio				1:1			
Indicative ratio from motor to PTO's output							
G210	High: 1 : 1.03	Normal: 1 : 0.85		G260	High: 1 : 1.50	Normal: 1 : 1.24	
G211	High: 1 : 0.85	Normal: 1 : 0.71		G131 - 9 / 14.57	1 : 0.743		
G221	High: 1 : 0.85	Normal: 1 : 0.71		G125 / G155 / G180	High: 1 : 1.128	Normal: 1 : 0.958	
G240	High: 1 : 1.24	Normal: 1 : 1.03		G200	High: 1 : 1.126	Normal: 1 : 0.949	

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material.



ABER - Embraiagens e Comandos Hidráulicos - A. B. LDA
Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470 MAIA - Portugal
Telephone: +351.22.9438070 Fax: +351.22.9420823 e-mail: aber@aber.pt <http://www.aber.pt>