



Power Take Offs

Relation 1 : 1,73


Ref. TF8014AMP

MERCEDES

G210; G211; G221; G240; G248; G260; G131-9; G231-16; G241-16;
G330 (G125 ; G155 ; G180 ; G200 Current flange produced after 1990)

To apply with Gear Pumps or with Piston Pumps

Main Dimensions

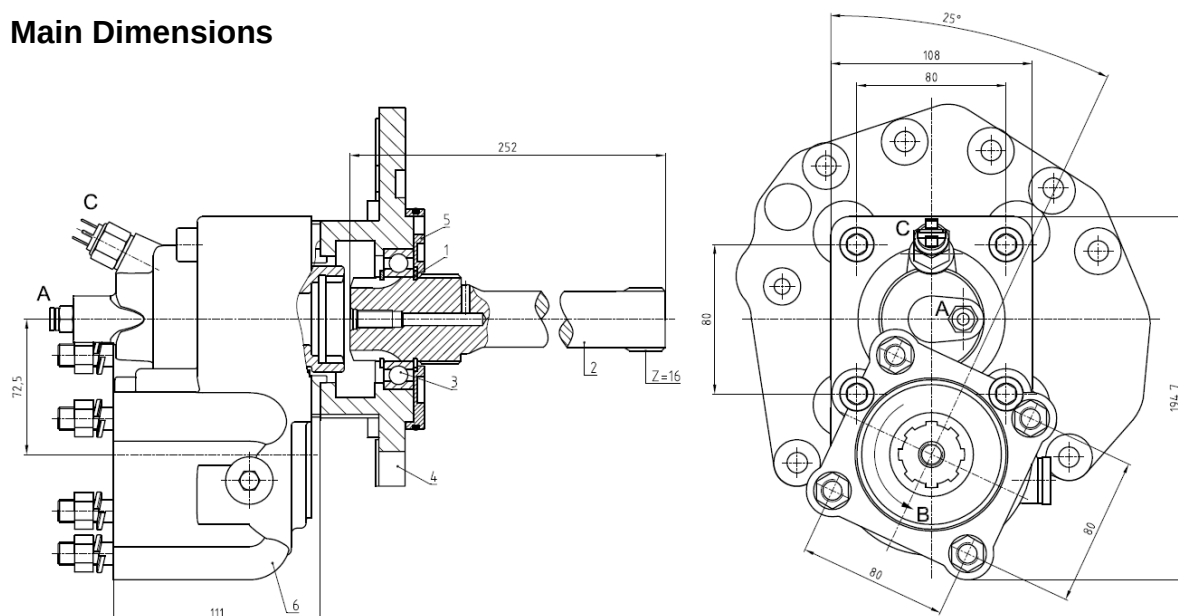

A – Air connection

B – Sense of rotation

C – Option: Electric sensor with mechanical driving Ref. TF8014AMPS or TF8014AMPC

1 – Circlip

2 – Adapter shaft VK8005

3 – Bearing

4 – Flange

5 – Plate

6 – TF4034AMP

(Dimensions in mm)

Main Data

Continuous Torque (Nm)		350
Intermittent Torque (Nm)		450
Power (at 1000 rpm)		48 cv / 36 kW
Mounting Position		Rear
Pump Rotation		Right Hand
Weight (kg)		17
PTO internal ratio		1:1,73
Indicative ratio from motor to PTO's output		
G210	High: 1 : 1.782 Normal: 1 : 1.471	G260 High: 1 : 2.595 Normal: 1 : 1.945
G211	High: 1 : 1.471 Normal: 1 : 1.228	G131 - 9 / 14.57 1 : 1.285
G221	High: 1 : 1.471 Normal: 1 : 1.228	G125 / G155 / G180 High: 1 : 1.951 Normal: 1 : 1.704
G240	High: 1 : 1.945 Normal: 1 : 1.782	G200 High: 1 : 1.948 Normal: 1 : 1.642

CTI TF8014AMP 1211-1

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material.



ABER - Embraiaçens e Comandos Hidráulicos - A. B. LDA

Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470 MAIA - Portugal

Telephone: +351.22.9438070 Fax: +351.22.9420823 e-mail: aber@aber.pt <http://www.aber.pt>

1/1