


Adapter KIT to Power Take Offs

Ref. VK4007AM


ZF

 16-S-151 IT ; 16-S-181 IT ; 16-221 IT ; 16-S-1620 IT ; 16-S-1820 IT ;
 16-S-1920 IT ; 16-S-2220 IT ; 16-S-2520 IT

Main Dimensions

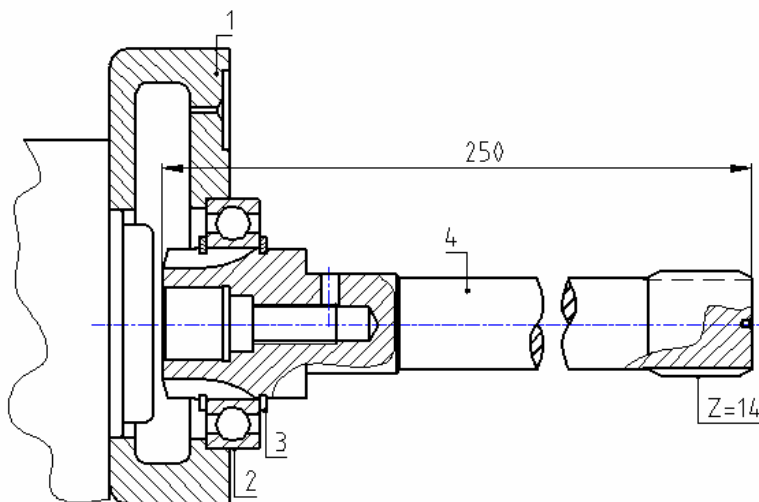

- 1 – Spacer
- 2 – Bearing
- 3 – Circlip
- 4 – Adapter shaft VK4007

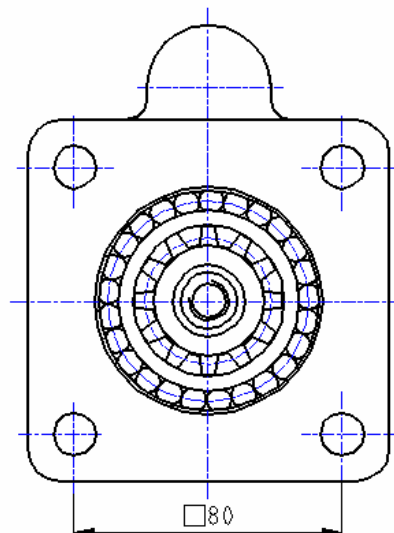

Main Data

Continuous Torque (Nm)	600
Intermittent Torque (Nm)	840
Power (at 1000 r.p.m)	85 C.V. / 64 Kw
Weight (Kg)	2
Engine-Kit adapter ratio	

16-S-151/221/13.85-0.84 High: .- 1 : 0.92 Normal: .- 1 : 0.77
 / 16.53-1.0 High: .- 1 : 0.92 Normal: .- 1 : 0.77

Note:

For getting the correct ratio is necessary to multiply the above mentioned ratio by the internal ratio in all S6-90 releases.

Example:

Gearbox 16-S-112 / 11.46 Adapter Kit + ZF S6-90 (Ref. TF4002AMP) Internal Ratio 1:1.32

Final ratio: High .- 1 : 1.2144 (0.92 x 1.32 = 1.2144)

Normal .- 1 : 1.0164 (0.77 x 1.32 = 1.0164)

KIT Studs:

KIT VK4023AM for PTO (ratio 1:1.32)

- 2 stud M12x135
- 2 stud M12x170
- 4 nut M12
- 4 washer
- 1 Jute ZF
- 1 Jute IT