




ADAPTER KIT TO POWER TAKE OFFS ZF

12-AS-1800 IT; 12-AS-1631 TD IT; 12-AS-1931 TD/TO IT; 12-AS-2131 TD/TO IT;
12-AS-2141 TD IT; 12-AS-2301 TD/TO IT; 12-AS-2341 TD IT; 12-AS-2431 TD IT;
12-AS-2331 TO IT; 12-AS-2531 TO IT; 12-AS-2541 TO IT; 12-AS-2741 TO IT;
12-AS-2941 TO IT;
16-AS-2200 IT; 16-AS-2231 TD IT; 16-AS-2601 TD/TO IT; 16-AS-2631 TO IT

Ref.VK4023S

Main Dimensions

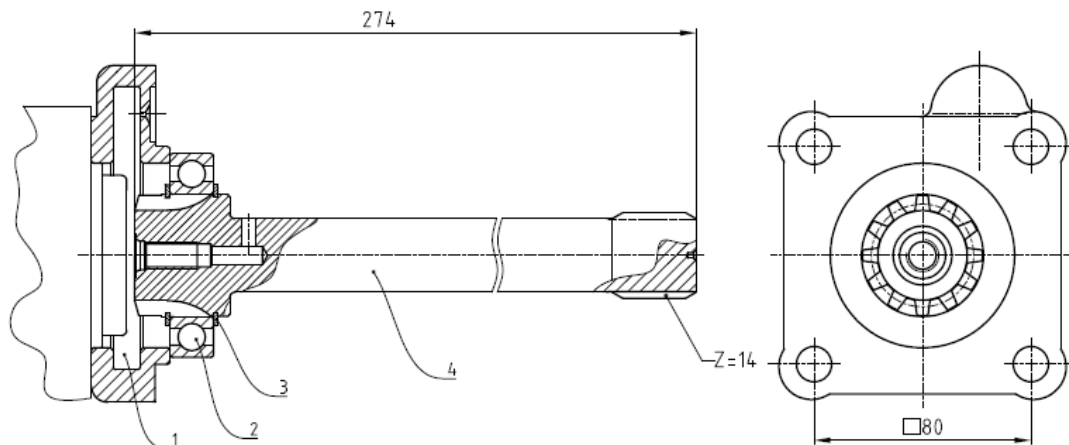

- 1 – Spacer
- 2 – Bearing
- 3 – Circlip
- 4 – Adapter shaft VK4023

(Dimensions in mm)

Main Data

Continuous Torque (Nm)	600
Intermittent Torque (Nm)	840
Power (at 1000 r.p.m)	85 H.P. / 64 Kw
Weight (Kg)	2.9
Engine-Kit adapter ratio	
12-AS-1631 TD IT; 12-AS-1931 TD IT; 12-AS-2131 TD IT; 12-AS-2141 TD IT; 12-AS-2301 TD IT; 12-AS-2341 TD IT; 12-AS-2431 TD IT	/15.68-1.0 1:0.82
12-AS-1800 IT	/14.89-1.0 1:0.76
12-AS-1931 TO IT; 12-AS-2131 TO IT; 12-AS-2301 TO IT; 12-AS-2331 TO IT; 12-AS-2531 TO IT;	/12.33-0.78 1:1.35
12-AS-2541 TO IT; 12-AS-2741 TO IT; 12-AS-2941 TO IT;	/12.29-0.78 1:1.35
16-AS-2200 IT	/15.89-1.0 1:0.71
16-AS-2231 TD IT; 16-AS-2601 TD IT	/17.03-1.0 1:0.76
16-AS-2601 TO IT; 16-AS-2631 TO IT	/14.12-0.83 1:1.11

KIT Studs:

KIT VK4023S for PTO (ratio 1:1)

- 4 stud M12x135
- 4 nut M12
- 4 washer
- 1 jute ZF
- 1 jute AS




ADAPTER KIT TO POWER TAKE OFFS ZF

12-AS-1800 IT; 12-AS-1631 TD IT; 12-AS-1931 TD/TO IT; 12-AS-2131 TD/TO IT;
12-AS-2141 TD IT; 12-AS-2301 TD/TO IT; 12-AS-2341 TD IT; 12-AS-2431 TD IT;
12-AS-2331 TO IT; 12-AS-2531 TO IT; 12-AS-2541 TO IT; 12-AS-2741 TO IT;
12-AS-2941 TO IT;
16-AS-2200 IT; 16-AS-2231 TD IT; 16-AS-2601 TD/TO IT; 16-AS-2631 TO IT

Ref.VK4023AM

Main Dimensions

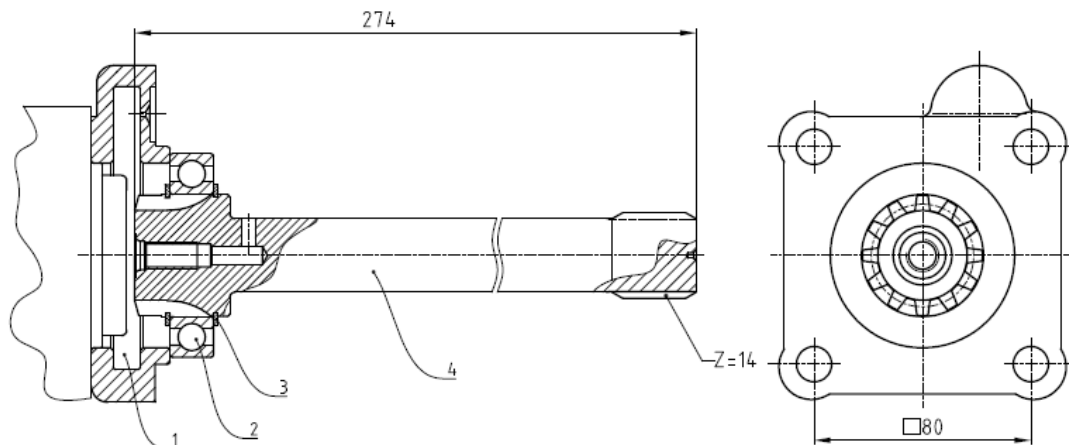

- 1 – Spacer
- 2 – Bearing
- 3 – Circlip
- 4 – Adapter shaft VK4023

(Dimensions in mm)

Main Data

Continuous Torque (Nm)	600	
Intermittent Torque (Nm)	840	
Power (at 1000 r.p.m)	85 H.P. / 64 Kw	
Weight (Kg)	2.9	
Engine-Kit adapter ratio		
12-AS-1631 TD IT; 12-AS-1931 TD IT; 12-AS-2131 TD IT; 12-AS-2141 TD IT; 12-AS-2301 TD IT; 12-AS-2341 TD IT; 12-AS-2431 TD IT	/15.68-1.0	1:0.82
12-AS-1800 IT	/14.89-1.0	1:0.76
12-AS-1931 TO IT; 12-AS-2131 TO IT; 12-AS-2301 TO IT; 12-AS-2331 TO IT; 12-AS-2531 TO IT;	/12.33-0.78	1:1.35
12-AS-2541 TO IT; 12-AS-2741 TO IT; 12-AS-2941 TO IT;	/12.29-0.78	1:1.35
16-AS-2200 IT	/15.89-1.0	1:0.71
16-AS-2231 TD IT; 16-AS-2601 TD IT	/17.03-1.0	1:0.76
16-AS-2601 TO IT; 16-AS-2631 TO IT	/14.12-0.83	1:1.11

KIT Studs:

KIT VK4023AM for PTO (ratio 1:1.32)

- 2 stud M12x113
- 2 stud M12x150
- 4 nut M12
- 4 washer
- 1 jute ZF
- 1 jute AS