


Power Take Offs

Ref. TF7007P

Eaton Fuller


RT ; RTO ; RTX 11609

Main Dimensions

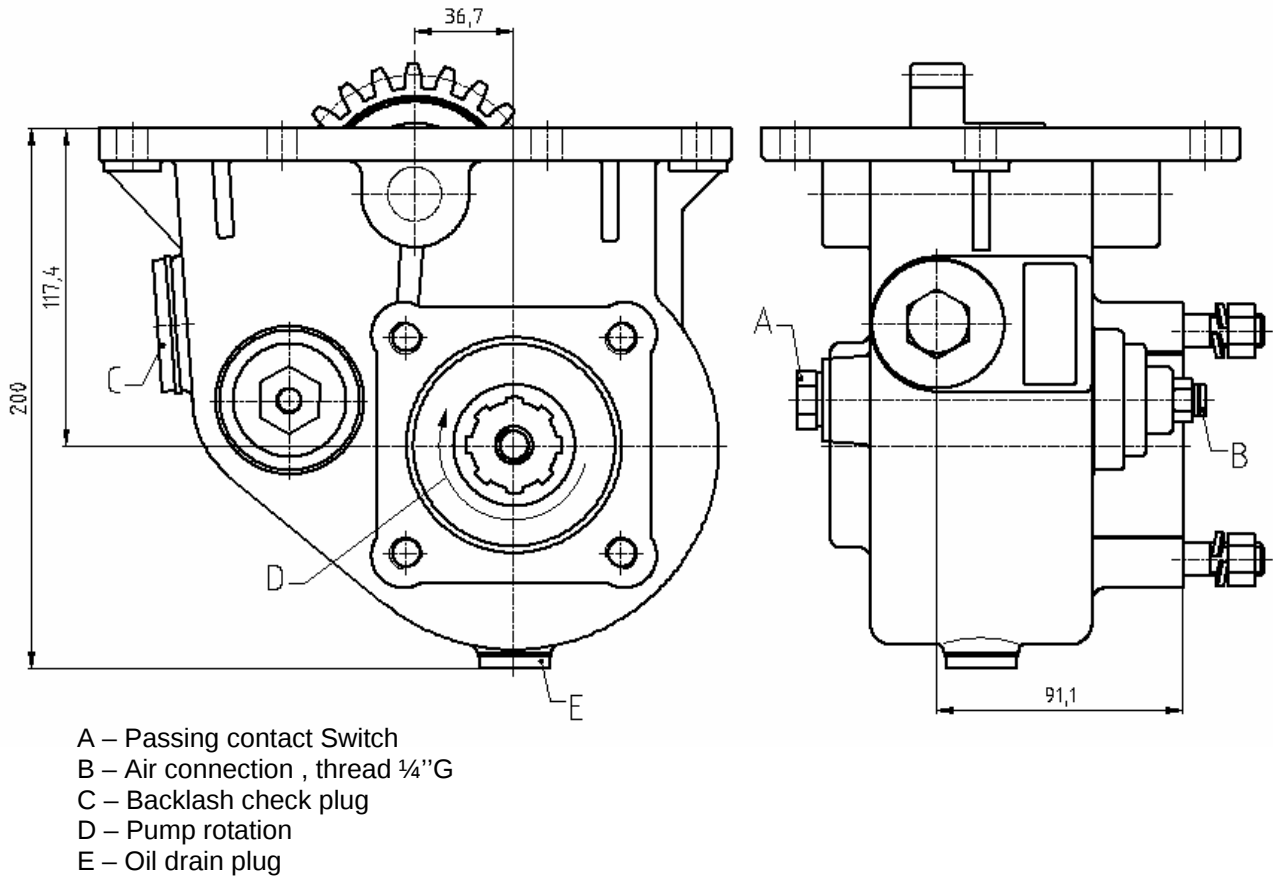

Main Data

Continuous Torque (Nm)	380
Intermittent Torque (Nm)	530
Power (at 1000 r.p.m)	53 C.V. / 39 Kw
Mounting Position	Bottom
Pump Rotation	Left Hand
Weight (Kg)	17.5
Engine to PTO ratio	



Power Take Offs

Ref. TF7007P

Eaton Fuller

RT ; RTO ; RTX 11609

Gear box	Ratio
----------	-------

7 Speeds

T-14607A	1.421
T-14607B	1.421
TX-14607B	1.922

9 Speeds

RT-6609A	0.848
RT-8608L	0.974
RTX-11609B	1.326
RTX-12609B	1.326
RTX-13609B	1.326
RTX-14609B	1.326
RTX-16709B	1.326
RT-8709B	1.175
RT-11709H	1.175
RT-12709H	1.175
RT-13709H	1.175
RT-14709H	1.175
RTOC-16909A	1.175

10 Speeds

RT-8908LL	1.175
RTO-11908LL	1.578
RTO-14908LL	1.578
RTO-16908LL	1.578
FR-9210B	1.091
FR-11210B	1.091
FR-12110B	1.091
FR-13210B	1.091
FR-14210B	1.091
FR-15210B	1.091
FRO-11210B	1.460
FRO-12110B	1.460
FRO-13210B	1.460
FRO-14210B	1.460
FRO-15210B	1.460
FRO-16210B	1.460
FRO-11210C	1.460
FRO-12110C	1.410
FRO-13210C	1.410
FRO-14210C	1.410
FRO-15210C	1.410
FRO-16210C	1.410
FRO-17210C	1.410
FRO-18210C	1.410

Gear box	Ratio
----------	-------

11 Speeds

RTO-11909ALL	1.326
RTO-14909ALL	1.326
RTO-16909ALL	1.326

13 Speeds

RTLO-12913A	1.326
RTLO-14913A	1.326
RTLO-16913A	1.326
RTLO-18913A	1.326
RTLO-20913A	1.326

15 Speeds

RT-14915	1.175
RTO-14915	1.494
RTO-16915	1.494

18 Speeds

RTLO-14918B	1.326
RTLO-16918B	1.326
RTLO-18918B	1.326
RTLO-20918B	1.326
RTLO-21918B7	1.326