


Adapter KIT to Power Take Offs

Ref. VK4005S
VK4005AM

ZF

16-K-130 ; 16-S-112 ; 16-S-150

Main Dimensions

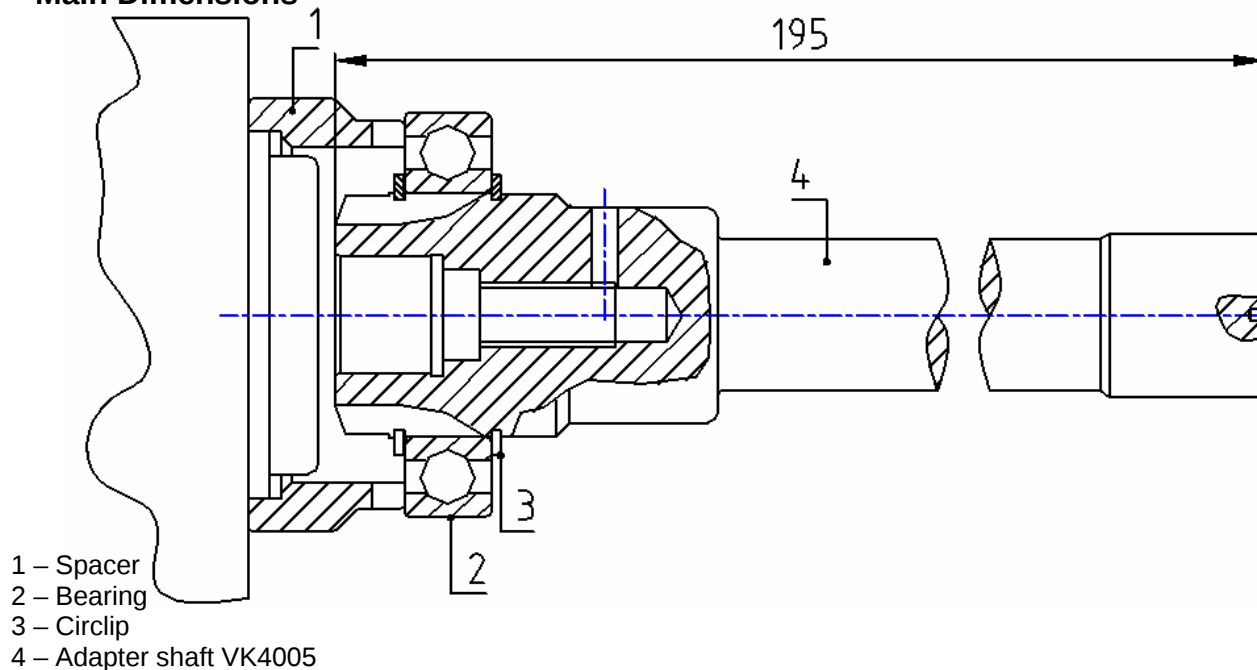

Main Data

Continuous Torque (Nm)	300
Intermittent Torque (Nm)	420
Power (at 1000 r.p.m)	42 C.V. / 32 Kw
Weight (Kg)	1.7
Engine-Kit adapter ratio	

16-S-112/11.46 High: - 1 : 0.963 Normal: - 1 : 0.820
/ 13.68 High: - 1 : 0.963 Normal: - 1 : 0.820

Note 1:

For getting the correct ratio is necessary to multiply the above mentioned ratio by the internal ratio in all S6-90 releases.

Example:

Gearbox 16-S-112 / 11.46 Adapter Kit + ZF S6-90 (Ref. TF4002AMP) Internal Ratio 1:1.32

Final ratio: High - 1 : 1.27116 ($0.963 \times 1.32 = 1.27116$)

Normal - 1 : 1.0824 ($0.82 \times 1.32 = 1.0824$)

Note 2:

Adapter Kit is supplied without studs. Please use those that are provided with the PTO.